




MICRÔMETRO COM PONTAS CONICAS



3230-25A

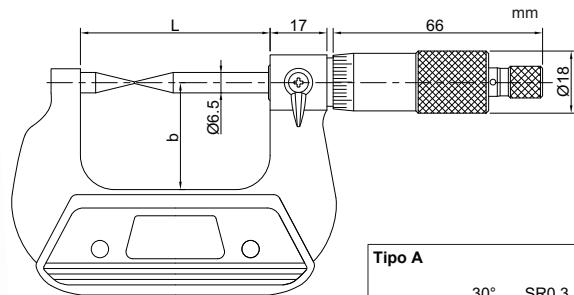

(mm)

Código	Capacidade	Tipo	Exatidão	L	b
3230-25A	0-25mm	A	4 μ m	57	32
3230-50A	25-50mm	A	4 μ m	82	44.5
3230-75A	50-75mm	A	5 μ m	107	57
3230-100A	75-100mm	A	5 μ m	132.6	69.5
3230-25BA	0-25mm	B	4 μ m	57	32
3230-50BA	25-50mm	B	4 μ m	82	44.5
3230-75BA	50-75mm	B	5 μ m	107	57
3230-100BA	75-100mm	B	5 μ m	132.6	69.5

- Para medição de espessura de brocas, pequenos rebaixos e chavetas
- Graduação 0.01mm
- Fuso não giratório
- Com catraca
- Fornecido com barras padrão de calibração exceto modelo de 0-25mm