





## MICRÔMETRO COM PONTAS TIPO LÂMINA



3232-25A

(mm)

Código	Capac.	Tipo	Exatidão	L	b
3232-25A	0-25mm	A	4 $\mu$ m	57	32
3232-50A	25-50mm	A	4 $\mu$ m	82	44.5
3232-75A	50-75mm	A	5 $\mu$ m	107	57
3232-100A	75-100mm	A	5 $\mu$ m	132.6	69.5
3232-125A	100-125mm	A	6 $\mu$ m	158	82
3232-150A	125-150mm	A	6 $\mu$ m	183.4	94.5
3232-175A	150-175mm	A	7 $\mu$ m	208.8	107
3232-25BA	0-25mm	B	4 $\mu$ m	57	32
3232-50BA	25-50mm	B	4 $\mu$ m	82	44.5

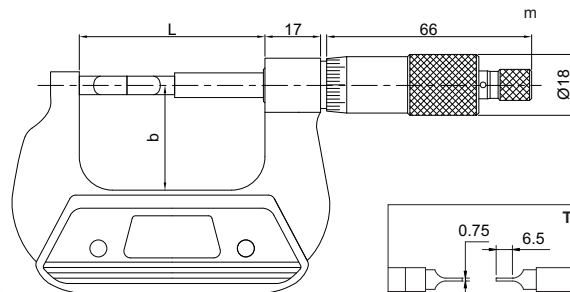

- Para medição de diâmetros e distâncias dentro de rebaixos
- Graduação 0.01mm
- Fuso não giratório
- Com catraca
- Fornecido com barras padrão de calibração exceto modelo de 0-25mm